

35692C LED EMERGENCY COMBO - SQUARE WET LOCATION 35693C LED EXIT SIGN WET LOCATION

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- Using provided hardware, thread nut onto pipe nipple. Slide pipe nipple through canopy center hole.
- Remove backing from self adhesive junction box gasket and adhere to back of mounting canopy. Remove backing from self adhesive pipe thread gasket and adhere to front of mounting canopy.
- Place screws (provided) in holes on the canopy.
- Route Exit input wires through knockout in EXIT frame, pipe nut and metal mounting plate.
- Make wiring connection. For 120V, use black and white a wire. For 277V, use red and white wires. **WARNING:** Properly insulate the unused lead with a wire nut (provided) or other approved means.
- Push wire connections into the J-Box. Secure mounting plate to junction box (hardware not included).
- Secure the canopy to the steel mounting plate with screws installed in step 7.
- Place pipe nipple through the mounting hole of the housing to lock the canopy into place. Once Canopy is locked into position there will not be any side-to-side movement of the canopy.
- Remove proper chevron (s) as required. When removing chevrons it may be helpful to remove the color Diffuser panel to allow easier access to the chevrons. If removing color diffuser panel it is important to Remember to reinstall the diffuser panel once chevron (s) have been removed.
- Connect battery to lamp board (battery back up models only).
- Secure face plate(s) to the housing.
- Secure lens to face plate and securely to torque screws.
- Apply continuous AC power and press " Test " button to check operation.

CONDUIT ENTRY

- Drill a 3/4" through the desired conduit entry. Knock out located on the top or side of the frame of the sign.
- Route the AC input conduit into housing.
- All conduit connections must use UL LISTED and SUITS BLE FOR WET LOCATION parts.
- To finish installation of EXIT sign, reference Wall, Ceiling or End Mount instructions.



FLEXIBLE CONDUIT ONLY!

OPERATION (BATTERY BACKUP)

- Apply AC power to the unit. The LED indicator will be RED.
- After the battery has been left to charge for 2 hours, test the unit by pushing the switch. The LED Indicator turns OFF and the LED board stays ON.
- When the switch is released, the LED indicator turns back to RED and the LED board stays ON.

MAINTENANCE

Caution: Always turn off AC power to the equipment before servicing. Servicing should be performed only by a qualified service technician. Use only MANUFACTURER supplied replacement parts.

BATTERY: The battery supplied with the EM model requires no maintenance. However, it should be tested Periodically and replaced when it no longer operates the connected sign for the duration of a 30-second or 90-minute test.


NFPA 101 (Life Safety Code) requires that all emergency lighting equipment be functionally tested every 30 days for a minimum of 30 seconds and tested annually for a full 90-minute duration. Written records of the testing are to be kept for examination by the authority having jurisdiction.

Wiring Diagram

**LED EMERGENCY COMBO -
SQUARE WET LOCATION**

LED EXIT SIGN WET LOCATION

AC Only

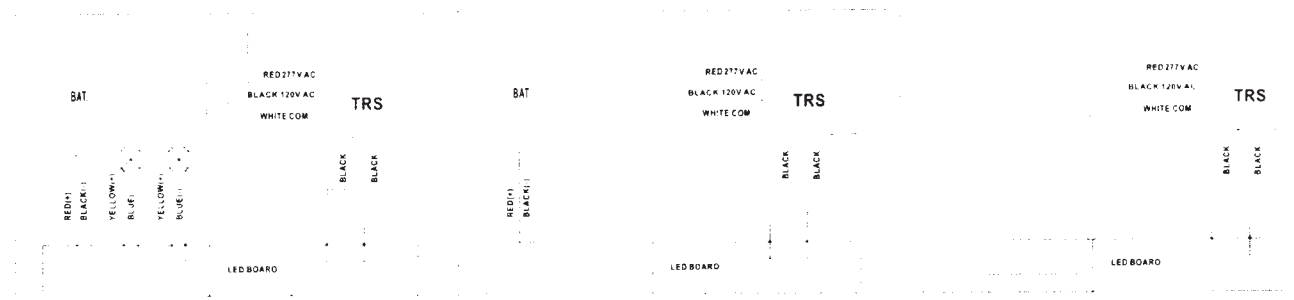

SAVE THESE INSTRUCTIONS
and deliver to owner after installation