



### FEATURES AND SPECIFICATIONS

### DIMENSIONS

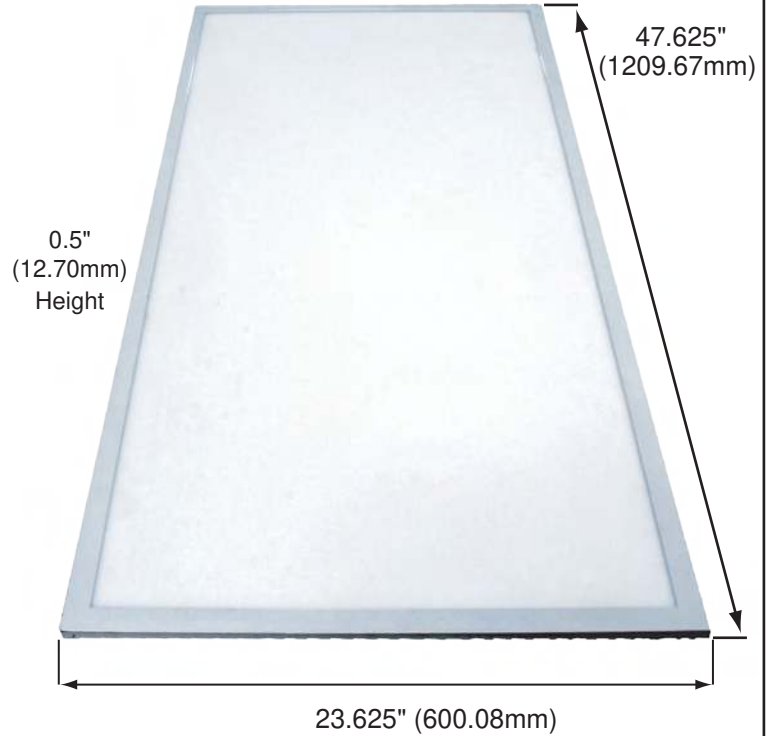

**Overall Length: 47.625" (1209.67mm)**  
**Width: 23.625" (600.08mm)**  
**Height: 0.5" (12.70mm)**  
**Weight: 21.8lb. (9.88 kg.)**  
**Shatter Resistant Low Glare Plastic Diffuser**  
**Dry or Damp indoor locations and applications**  
**This fixture is warranted to be free of defects in materials and workmanship for a period of five years from the date of the original purchase**




### PHOTOMETRICS

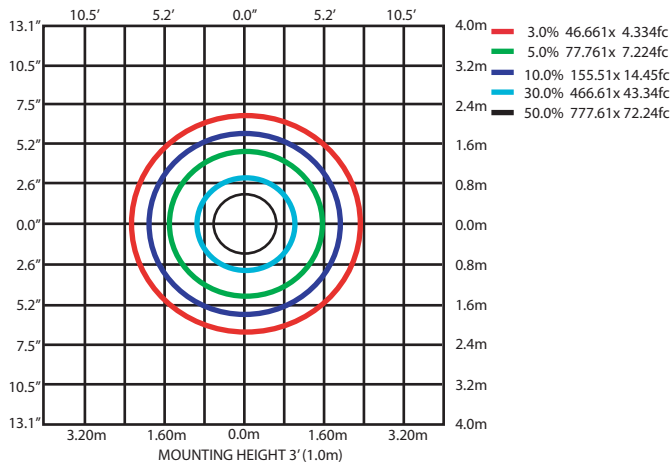


### MOUNTING DETAILS

1. Compare the fitting bag with components list.
2. Compare with the specification as follows to determine if the ceiling meets installation requirements.
3. Remove the ceiling tile.

SPEC	Size/mm	External size of T-channel/mm	Internal size of T-channel/mm	N.W./Kg
30120	300+1(L) 1210+1(W)	280+1(L) 1190+1(W)	303+1(L) 1213+1(W)	4
6060	600+1(L) 600+1(W)	580+1(L) 580+1(W)	603+1(L) 603+1(W)	4
60120	600+1(L) 1210+1(W)	580+1(L) 1190+1(W)	603+1(L) 1213+1(W)	7.5



4. Tilt the lamp front down 30-45° and place into the ceiling channel.
5. Check that the lamp has been fixed in the ceiling channel.



**33174B LED50-53W/35K**



**Wattage: 53W**  
**CCT: 3500K**  
**CRI : 80**  
**Avg Life Hrs: 50,000**  
**Avg Lumens: 5000**  
**Voltage: 100-277V**  
**Hertz: 50/60Hz**

**DAMAR®**  
**805 N Carnation**  
**Aurora, MO 65605**  
**Made in China**