




### Specifications

Item	- 34184E
Model	- LED T-BAY 2FT 150W/5K G3
Bulb Type	- LED
Input Voltage	- 100-277VAC
Watts	- 150
Width	- 16.0"
Height	- 2.25"
Length	- 22.0"
Color Temp	- 5000K
CRI	- 80
Lumen	- 19,500
Finish	- White
ETL Rating	- Yes
Location Rating	- Suitable for Damp Locations
Included in box	- Two Mounting Chains and Locking Rings
Avg Life Hours	- 50,000

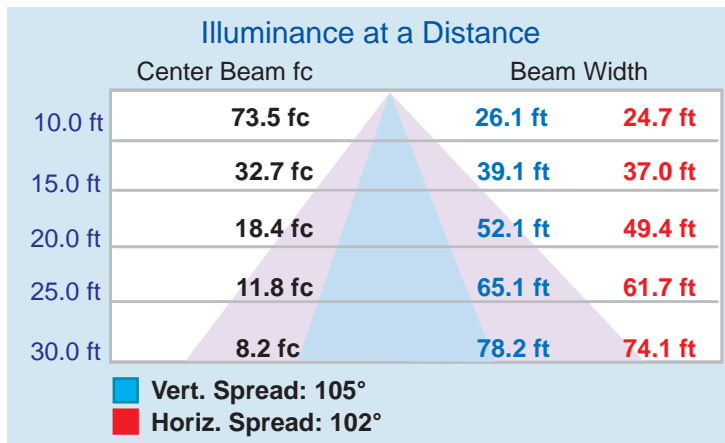

### Caution

- This fixture must be wired in accordance with the National Electrical Code and applicable local ordinance. Proper grounding is required to ensure personal safety. Carefully observe grounding procedure under the installation section.
- Make certain power is OFF before starting the installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.
- Disconnect power at fuse or circuit breaker before installing or servicing.
- RISK OF BURN - Disconnect power and allow the fixture to cool before servicing.
- RISK OF PERSONAL INJURY - Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.
- Este accesorio debe ser cableado de acuerdo con El Código Eléctrico Nacional y las normas locales aplicables. Se requiere una conexión a tierra adecuada para garantizar seguridad personal. Observar cuidadosamente la puesta a tierra. Procedimiento en la sección de instalación.
- Asegúrese de que la alimentación esté apagada antes de iniciar la Instalación o intento de mantenimiento. Riesgo de Incendio / descarga eléctrica. Si no está calificado, consulte a un electricista.
- Desconecte la corriente en el fusible o disyuntor antes de instalación o mantenimiento.
- RIESGO DE QUEMADURA - Desconecte la alimentación y permita El aparato se enfríe antes de realizar el mantenimiento.
- RIESGO DE LESIONES PERSONALES - El accesorio puede dañarse y / o inestable si no está instalado correctamente. Apretar todos los componentes del accesorio para Sus valores de par recomendados.



**! WARNING**

- To reduce the risk of electrical shock fire, or injury to person; all installation should be performed by a qualified electrician.
- Ensure power is off before installation or inspection. All wiring must be performed in accordance with Electrical Code and local electrical code.
- Fixtures are rated for use in 100-277V, 50-60HZ protected circuit and 194°F rated supply wire
- Wear gloves, safety glasses or goggles while performing installation.
- Install kit only in the luminaire that has the construction features and dimensions shown in the drawings. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion, do not expose wiring to edge of sheet metal or sharp objects.
- Do not alter, relocate, or remove wiring, lampholders, power supply, or any other electrical components.

**Installation**

**1**

Ensure power is off before installation.  
Unlock the hoop at the ends of the chain.

**2**

Lock the chain and hole on the housing.  
(Please keep the fixture horizontal)

**3**

Connect the cable,  
L= black wire, N= white wire, G= green wire.  
Keep circuit open during the process.

**4**

Ensure power is off before installation.  
Use M5 screw to lock the bracket and NPT pole.

**5**

Use screw, washer and gasket to lock the bracket and fixture.

**6**

Put the cable through the NPT pole,  
Connect the cable in the junction box.  
L= black wire, N= white wire, G= green wire.  
Keep the circuit open during the process. (Install safety chain if needed)

**7**

Ensure power is off before installation.  
Match the distance of screw hole to the ceiling. Drill the holes in suitable size.  
Use Screws to install the bracket to ceiling.

**8**

Use screw, washer and gasket to lock the bracket and fixture.

**9**

Connect the cable in junction box,  
L= black wire, N= white wire, G= green wire.  
Please keep the circuit open during the process