

LED HIGHBAY RETROFIT

Specifications



| | |
|------------------------|-----------------------------------|
| Item | - 37323A |
| Model | - LED HIGHBAY RETROFIT |
| Bulb Type | - LED |
| Beam Spread | - 120° |
| Input Voltage | - 100-277VAC 50/60Hz |
| Watts | - 200W |
| Base Type | - EX39 |
| Color Temp | - 5000K |
| CRI | - >80 |
| Lumen | - 28000 |
| Dimmable | - No |
| UL Rating | - Suitable for Dry/Damp Locations |
| Life | - 50,000 Hours |
| Ambient operating temp | - -40°F to 113°F (-40°C to 45°C) |
| Diameter | - 8.9" (226.06 mm) |
| Length | - 8.96" (227.58mm) |
| Surge Protection | - 4KV |
| | - Active cooling |


Caution

- Use only with a portable table luminaire that is provided with a shade.
- This device is not intended for use with dimmers or remote controls.
- This device is not intended for use with emergency exits.
- Added weight of the device may cause instability of a free-standing portable luminaire.

Warning

Read These Instructions Completely and Carefully.


- Disconnect electrical power to fixture and follow proper lockout/tag out procedures before installation or maintenance. Contact a qualified electrician for installation.
- This device requires 100-277VAC input voltage.
- This device requires all ballasts, capacitors, and starters to be bypassed/removed.
- For dry or damp locations. DO NOT use where directly exposed to liquid, vapor, rain.
- This device is suitable for enclosed fixtures, minimum lamp compartment dimensions:
For 200W: 11.81 inch (L) x 11.81 inch (W) x 9.69 inch (H)
- OPERATING TEMPERATURE: -40°C to 45°C (-40°F to 113°F)
- Base UP and Base Down use only.
- This device has active cooling.



Plug & Play Safety cable


Must be installed
for safety purpose

Wiring Diagram

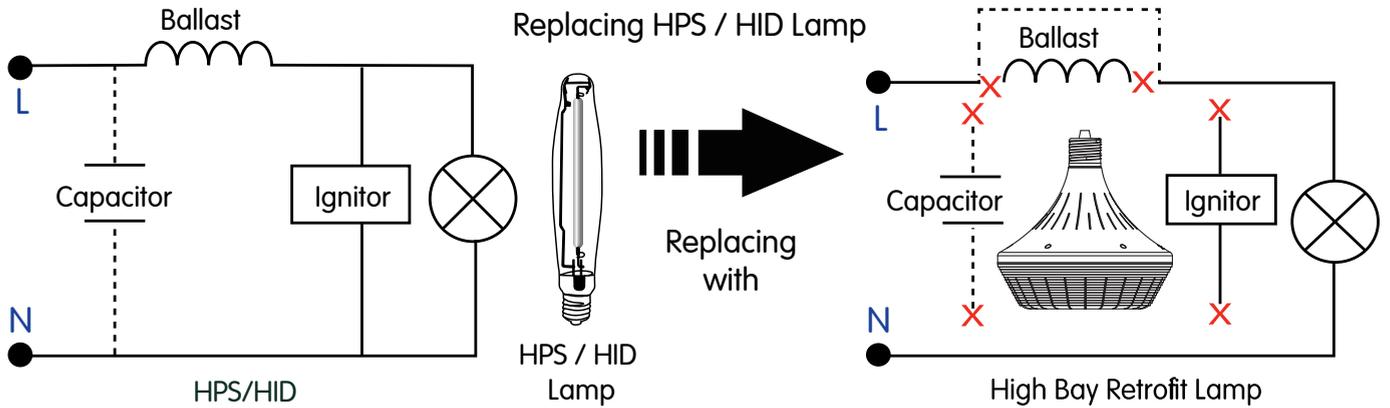

Installation

Lamp Installation

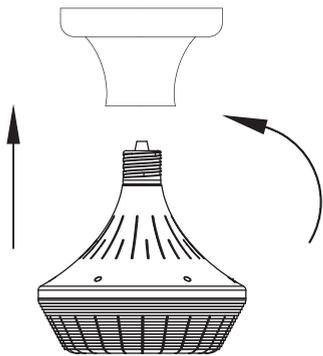

Step:1

Shown as Figure 1
Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner.
(North America 100-277VAC)

Step:2

Shown as Figure 2
Reconnect directly to the existing lamp holder.
(North America 100-277VAC)

Step:3

Shown as Figure 3
Install new LED replacement lamp. Please make sure the old fitting is correctly grounded.
Attach the safety cable.
(North America 100-277VAC)

