



Specifications

Item	-	39753A
Model	-	LED45CC/3CCT/27W/36W/45W E26
Bulb Type	-	LED Type B, ballast must be bypassed
Bulb Shape	-	Corn Cob Post Top
Base	-	E26
Watts	-	27/36/45W Selectable
Input Voltage	-	120-277VAC 50/60Hz
Lumens	-	3K= 3915-5220-6500 4K= 4130-5500-6900 5K= 3990-5320-6700
Color Temp.	-	3000-4000-5000K Selectable
CRI	-	> 80
Beam Spread	-	360°
Dimmable	-	No
Average Life Hours	-	50,000
Ambient Operating Temp.	-	-40°F~ 122°F (-40°C~50°C)
Length	-	5.60" (142.3 mm)
Diameter	-	2.68" (68 mm)
Surge Protection	-	4KV
Location Rating	-	Suitable for Dry/Damp Locations
Enclosed Rated	-	Yes

WARNING – Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of the luminaire's electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

WARNING – Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings, and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.

WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

• THE RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS.



- SUITABLE FOR DAMP LOCATIONS.
- ADDED WEIGHT OF THE DEVICE MAY CAUSE INSTABILITY OF A FREE STANDING PORTABLE LUMINAIRE.
- USE ONLY WITH A PORTABLE TABLE LAMP THAT IS PROVIDED WITH A SHADE.
- USE IN PORTABLE TABLE LAMPS IN WHICH THE DISTANCE FROM THE BOTTOM OF THE BASE TO THE TOP OF THE LAMPHOLDER DOES NOT EXCEED THREE (3) TIMES THE MINIMUM BASE DIAMETER.
- THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS OR EMERGENCY LIGHTING.

Notice: The kit includes a Modified Luminaire Label that must be attached in a visible location on the retrofitted luminaire.




CCT & Power Selectable

- CCT Selectable: Select your desired CCT by sliding the switch as the picture below shows.
 - Power Selectable: Select your desired wattage by sliding the switch as the picture below shows.
- NOTE: PLEASE SELECT THE DESIRED CCT OR WATTAGE BEFORE LIGHTING UP THE LAMP.

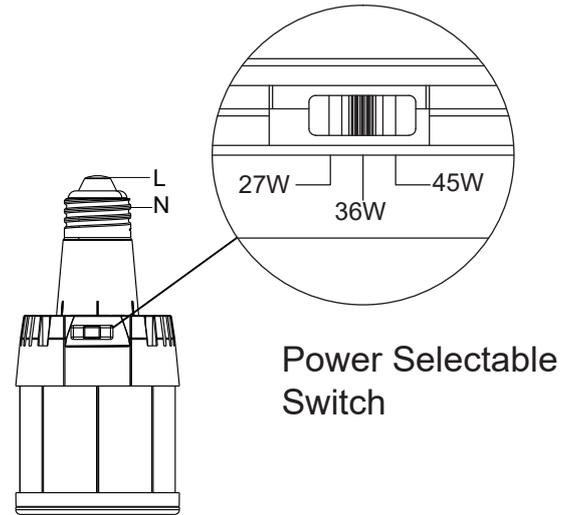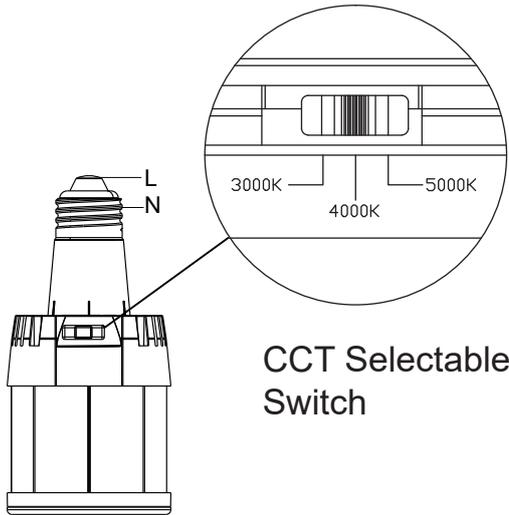

Installation

Lamp Installation

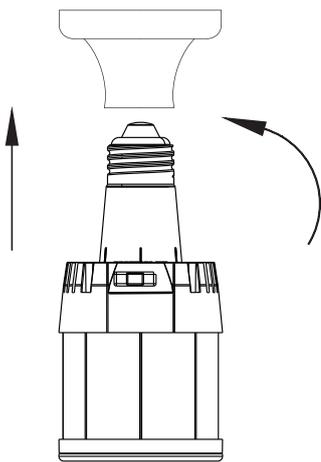

Step:1

Shown as Figure 1
Remove old ballast or disconnect from the existing lamp holder. Remove and dispose of the ballast in a correct manner.
(Input voltage 120-277VAC)

Step:2

Shown as Figure 2
Reconnect directly to the existing lamp holder.
(Input voltage 120-277VAC)

Step:3

Shown as Figure 3
Install the new LED replacement lamp. Please make sure the old lamp holder is correctly grounded.
(Input voltage 120-277VAC)

Step:4

Attach retrofit label to luminaire.

