**WARNING: Risk of Fire or Electric Shock**

Installation of this LED Retrofit Kit requires expertise in luminaire electrical systems. Do not attempt installation unless you are qualified. If in doubt, contact a licensed electrician.

WARNING: Risk of Fire or Electric Shock

Install this kit only in luminaires that conform to the construction features and dimensions specified in the provided photographs or drawings. Ensure the input rating of this retrofit kit does not exceed that of the luminaire.

Do not create or modify any open holes in the enclosure of wiring or electrical components during installation.

WARNING: To Prevent Wiring Damage or Abrasion

Do not expose wiring to the edges of sheet metal or other sharp objects.

Installers must not disconnect existing wires from lamp holder terminals to make new connections. Instead, cut the existing lamp holder leads and use appropriate connectors to establish new electrical connections to the lamp holder lead wires.

This product is rated :SUITABLE FOR WET LOCATIONS.

WARNING: Risk of Fire or Electric Shock

Do not alter, relocate, or remove wiring, lamp holders, power supply, or any other electrical components.

The Retrofit Kit is accepted as a component of a luminaire. The suitability of the combination must be determined by the authorities having jurisdiction.

This device is NOT intended for use with emergency exits.

Ambient Operating Temperature: -13°F to 104°F (-25°C to 40°C).

Suitable for wet locations.

Suitable for an insulated ceiling.

Type IC rated for direct contact with insulation.


Triac dimmable.

ELECTRICAL PARAMETERS

Model	Input Voltage (V)	Input Frequency (Hz)	Input Current (A)	Input Wattage (W)
39661A	120V	60Hz	0.085/ 0.11/ 0.125	10W/ 12W/ 14W

Dimensions:

Unit: in/mm

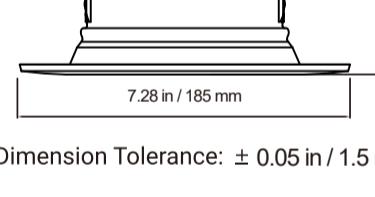

3.15 in / 80 mm

STEPS

Before Installation:


Select the desired CCT (Correlated Color Temperature) and Wattage by adjusting the switch located on the back of the device.

Dimension Tolerance: ± 0.05 in / 1.5 mm

Step 1: Turn off the power before installation.


If necessary, remove the diffuser and the existing bulb, then remove the existing trim.

Attach the Modified Luminaire Sticker label to the inside of the recessed luminaire housing.



(Figure 1)

(Figure 2)

**Step 2: As shown in Figure 1.**

Twist the lamp base into the lamp holder until securely fastened.



(Figure 3)

(Figure 4)

</