



### FEATURES AND SPECIFICATIONS

### DIMENSIONS

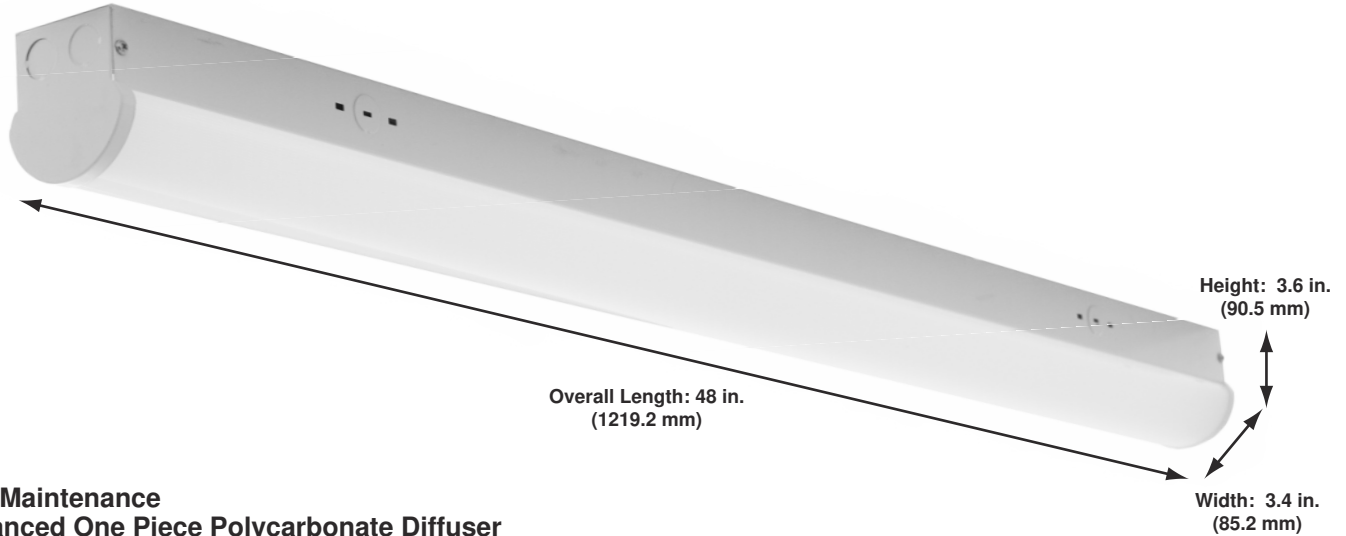


**Low Maintenance**  
**Enhanced One Piece Polycarbonate Diffuser**  
**Operating Temperature -40°F to 104°F**  
 (-40°C to 40°C)  
**50,000 Hours Rated Average Life**  
**UL Damp Location Rated**  
**Limited Warranty: This fixture is warranted to be free of defects in materials and workmanship for a period of 5 years from the date of the original purchase.**

### PHOTOMETRICS

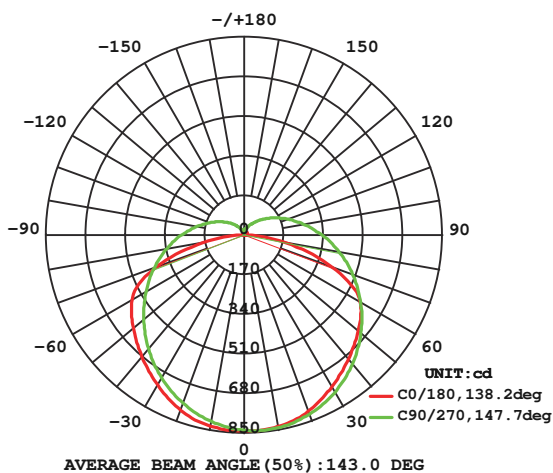

### WIRING DETAILS

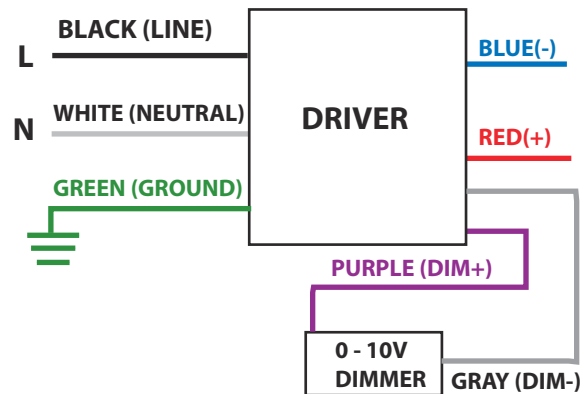

33683A

LED STRIP 34  
4K/4FT/DIM



Wattage: 34W  
 CCT: 4000K  
 CRI : 80  
 Avg Hours: 50,000  
 Avg Lumens: 4300  
 Voltage: 120-277V  
 Hertz: 50/60Hz

# DAMAR®

805 N Carnation  
Aurora, MO 65605







### WARNING

1. Ensure power is off before starting installation, wiring or attempting any maintenance should be performed by a person familiar with the construction and operation of the product and hazards involved to ensure personal safety.
2. All work should be performed by a qualified electrician.
3. The ceiling should have the enough strength for installing the fixture; Its endurance must be more than the weight of fixture.

### Installation

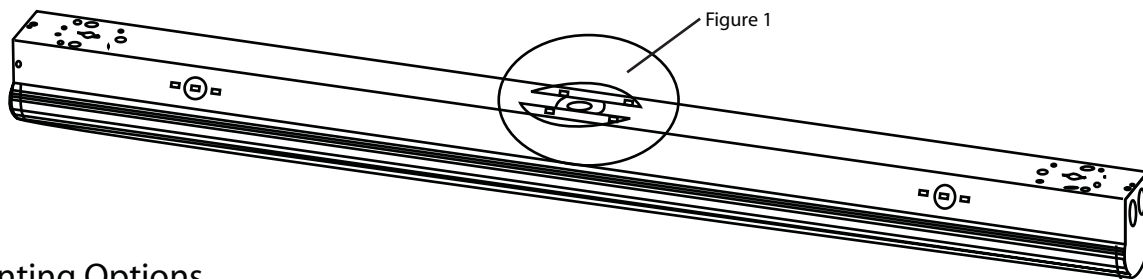

#### Mounting Options

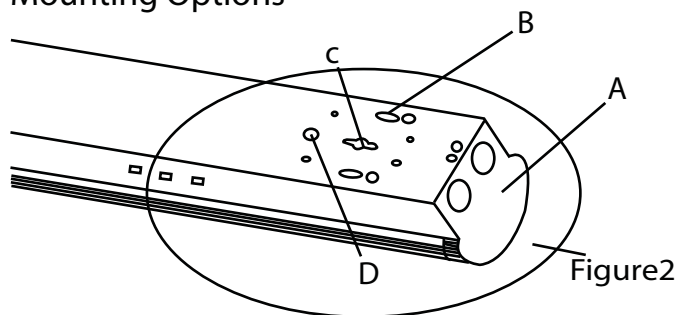

- A: End cap with knockouts
- B: Chain Mounting with V hook
- C: Surface Mounting
- D: T-Bar Clip Mounting Hole

#### Installation Step:

Always turn off the power supply from the main circuit breaker first!

##### B: Chain Mounting with V hook

Attach customer supplied V-Hooks to each end of the luminaire base. attach customer supplied chain to the V-hooks and mounting surface

##### C: Surface Mounting

Secure luminaire base to mounting surface by inserting customer supplied #8 anchor screws, toggle bolts or suitable fasteners, depending on structural conditions, into key hole slots on the top side of the luminaire base.

##### D: T- Bar Clip Mounting Hole

Attach customer supplied T-Bar clips to the designat opening on the luminaire as shown in Figure 2  
Bring luminaire into T-Bar ceiling grid and secure luminaire to grid

**NOTE:** (Please see Figure 1, Rear of Base is provided with holes for mounting.)