Specifications

Item	36052O
Model	LED UFO 80W/120W/150W 3CCT
Type	LED
Input Voltage	120-277VAC 50/60Hz
Watts	80W/120W/150W Selectable
Diameter	10.43" (265mm)
Length	7.01" (178mm)
Color Temp	3500K/4000K/5000K Selectable
CRI	>80
Lumens	35K= 11,200/16,800/21,000 40K= 12,000/18,000/22,500 50K= 11,200/16,800/21,000
Power Factor	≥0.9
Finish	Black
Dimmable	Yes, 0-10V
Wet Location	Yes
Surge Protection	6KV
Average Life Hours	50,000
Beam Angle	70°/90°/105° Electronically Selectable
Motion Sensor	Optional (39554A)

Note

Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage, and/or product malfunction.

This luminaire is designed to operate in ambient temperatures ranging from -40°F to 122°F (-40°C to 50°C).
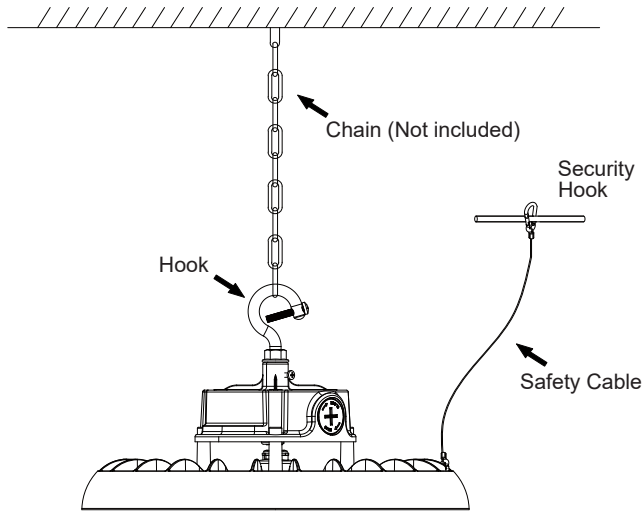
This product is not suitable for several special environments, such as those containing corrosive gases, corrosive liquids, or high-pressure water vapor.

Warning

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

— This fixture must be wired in accordance with the national electrical code and applicable local codes and ordinances.
— Proper grounding is required to insure personal safety. Carefully observe the grounding procedure under the installation section.
— All work should be done by a qualified electrician.
— Risk of electric shock - Disconnect power at fuse or circuit breaker before installing or servicing.
— Risk of burn - Disconnect power and allow fixture to cool before servicing.
— Risk of personal injury - Fixture may become damaged and/or unstable if not installed properly.
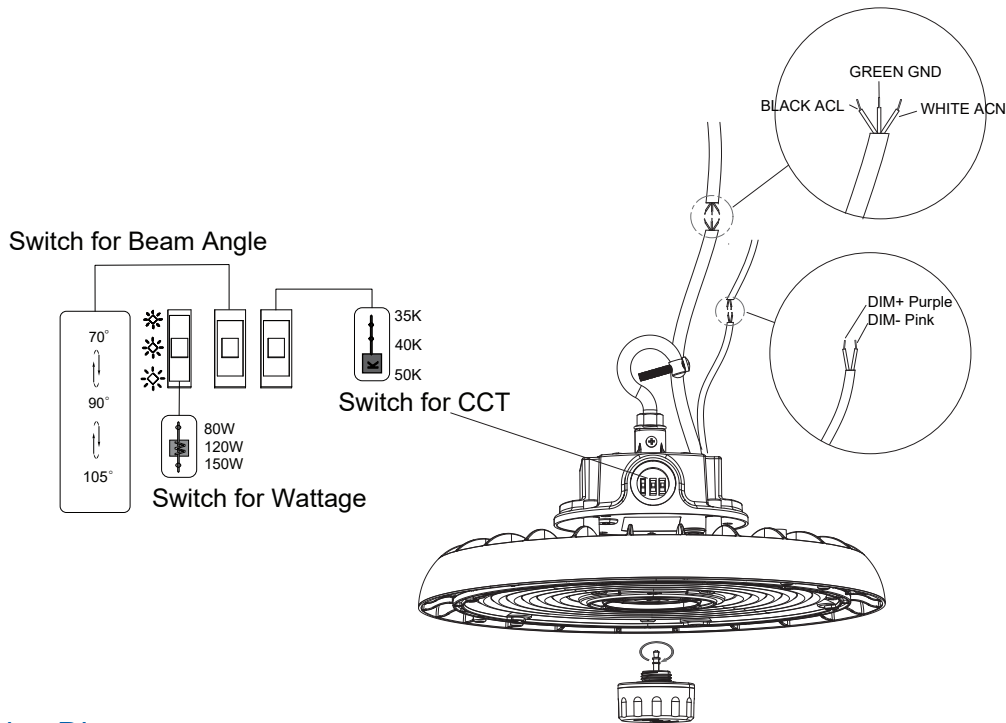— Tighten all fixture components securely.

ETL LISTED Intertek US   FC   3 YEAR LIMITED WARRANTY

DAMAR®
805 N Carnation Drive
Aurora, MO 65605

Lighting
the World

Installation

Chain (Not included)

Hook

Security Hook

Safety Cable

CEILING MOUNTING
1. Screw the hook into the fixture, then tighten and secure it.
2. Hang the fixture on the ceiling chain (Not included).
3. Attach the safety cable to the cooling fin with the cutout.
4. After installation, connect the wires of the fixture to the mains according to local wiring rules, ensuring the connection is secure and protected.

Wattage, CCT, & Beam Angle Guidance

GREEN GND

BLACK ACL   WHITE ACN

DIM+ Purple
DIM- Pink

Switch for Beam Angle

70°

90°

105°

35K
40K
50K

Switch for CCT

80W
120W
150W

Switch for Wattage

Wiring Diagram

Black L

White N

Green

Lighting Fixture

Input Voltage
120-277VAC 50/60Hz

Purple DIM+

Pink DIM-

0-10V Dimming