



Specifications

Item	- 36279C
Model	- LED UFO 200W/220W/240W 3CCT
Bulb Type	- LED
Input Voltage	- 120-277VAC 50/60Hz
Watts	- 200W/220W/240W Selectable
Diameter	- 14.17" (360mm)
Length	- 6.50" (165mm)
Color Temp	- 3000K/4000K/5000K Selectable
CRI	- >80
Lumens	- 29000/31900/34800
Power Factor	- ≥0.9
Finish	- Black
Dimmable	- Yes, 0-10V
Wet Location	- Yes
Surge Protection	- 4KV
Life	- 50,000
Beam Angle	- 90°
Motion Sensor	- Optional (36279E)

Note

Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.

This luminaire is designed to operate in ambient temperatures ranging from -45°C to 45°C (-49°F to 113°F).

This product is not suitable for several special environments, such as places with corrosive gas liquids or high pressure water vapor. Suitable for wet locations.


Warning

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- This fixture must be wired in accordance with the national electrical code and applicable local codes and ordinances.
- Proper grounding is required to insure personal safety. Carefully observe the grounding procedure under installation section.
- All work should be done by a qualified electrician.
- Risk of electric shock - Disconnect power at fuse or circuit breaker before installing or servicing.
- Risk of burn-Disconnect power and allow fixture to cool before servicing.
- Risk of personal injury - Fixture may become damaged and/or unstable if not installed properly.
- Tighten all fixture components to their recommended torque values.




Installation

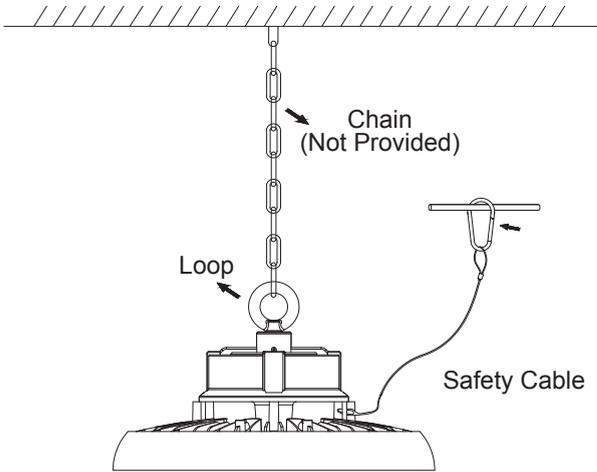

CEILING MOUNTING

1. Screw the loop into the fixture, tighten and secure it.
2. Hang the fixture on the ceiling chain.
3. Attach the safety cable.
4. After installation, connect the wires of the fixture to the mains according to local wiring rules, ensuring the connection is secure and protected.

Wattage & CCT Selectable Guidance

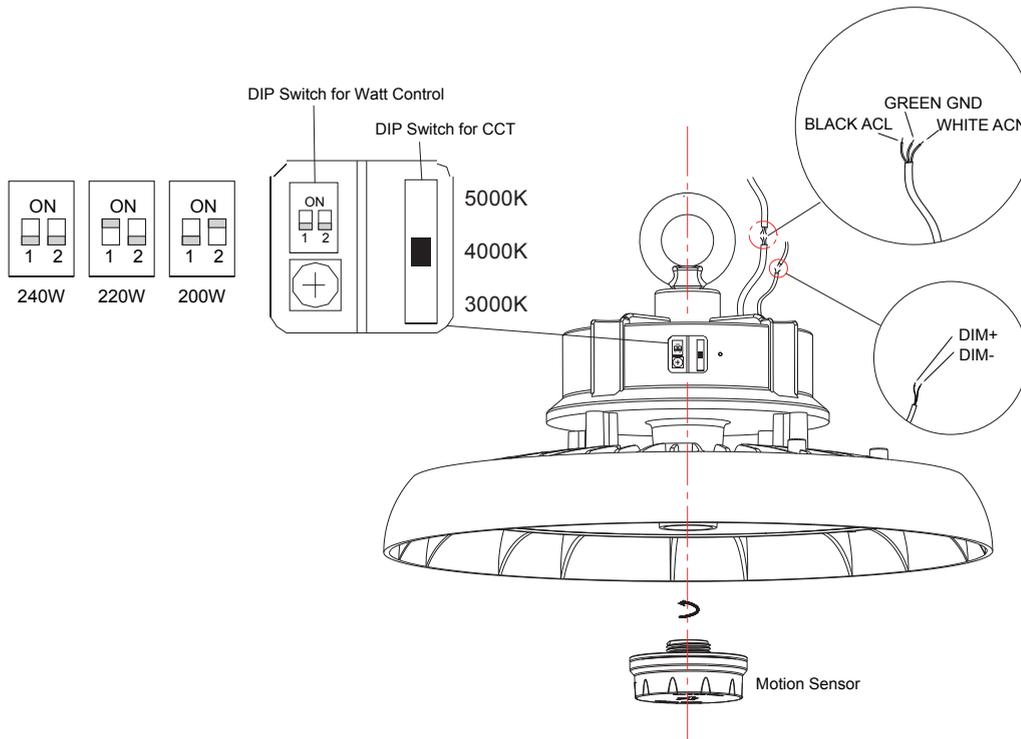

Wiring Diagram

