


LED FLOOD 30W 3CCT 3K/4K/5K



WIRING DIAGRAM

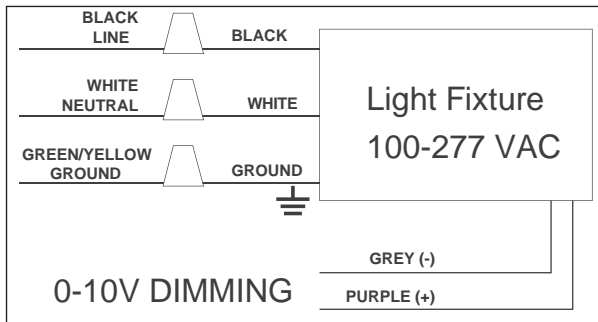

Caution

- This fixture must be wired in accordance with the National Electrical Code and applicable local ordinance. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.
- Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.
- Disconnect power at fuse or circuit breaker before installing or servicing
- Risk OF BURN--Disconnect power and allow fixture to cool before servicing.
- RISK OF PERSONAL INJURY--Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

Specifications

Item	- 36415A
Model	- LED FLOOD 30W 3CCT 3K/4K/5K
Bulb Type	- LED
Input Voltage	- 100-277 VAC 50/60Hz
Watts	- 30
PF	- >0.9
Dimmable	- Yes (0-10V)
Beamspread	- 120°
Color Temp	- CCT Selectable (3K, 4K, 5K)
CRI	- 80
Lumen	- 3900
Photocell	- Yes, Selectable On, Off
Average Life Hours	- 50,000
Location Rating	- Suitable for Wet Locations (IP65)
Ambient Operating Temp	- -22°F to 122°F (-30°C to 50°C)
Surge Protection	- 2KV
Length	- 8.72" (221.5 mm)
Width	- 6.72" (170.7 mm)
Height	- 2.0 (50.8mm) inches



Dimmable

