

Specifications

Item - 37320C

Model - PHOTOCELL FOR WALLPACK 37320A/37321A

Installation

Step 1 Remove the 1/2" knock out from the rear housing counter clockwise with a cross screwdriver. (Fig1)

Step 2 Check whether silicone ring is inserted on the photocell, make sure the waterproof ring is installed in the thread hole, and twist it clockwise with a cross screwdriver. (Fig2)




Fig1




Fig2



LED FIXTURE ACCESSORY

Step 3 Disassembly the FWP by unscrewing the 2 screws on right side of the fixture, and put aside the front housing on a flat surface. (Fig3)

Step 4 Connect the male connector of power-side and the female connector of photocell-side. (Fig4)

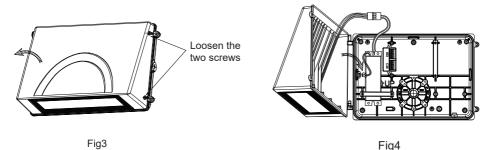

Step 4 Check if the fixture work properly and lock the fixture by the 2 side screws. Installation is completed. (Fig5)



Schematic Diagram

