

Specifications

Item - 37381G

Model - PHOTOCELL FOR WALLPACK
37381H/37382B/37320D/
37321C/33742C/33744C

Installation

Step 1 Remove the 1/2" knock out from the rear housing counter clockwise with a cross screwdriver. (Fig 1.1, Fig 1.2, Fig 1.3)




Fig 1.1




Fig 1.2




Fig 1.3

Step 2 Verify the silicone ring is installed on the photocell. Check that the rubber ring from the 1/2" knockout removal is not left in the threaded hole. Insert the photocell and tighten it by screwing it in clockwise. (Fig 2.1, Fig 2.2, Fig 2.3)

Verify the silicone ring is inserted on the photocell.




Fig 2.1

Verify the silicone ring is inserted on the photocell.




Fig 2.2

Verify the silicone ring is inserted on the photocell.




Fig 2.3

Step 3 Disassemble the wallpack by unscrewing the 2 screws on right side of the fixture, and put aside the front housing on a flat surface. (Fig 3.1, Fig 3.2, Fig 3.3)




Fig 3.1




Fig 3.2

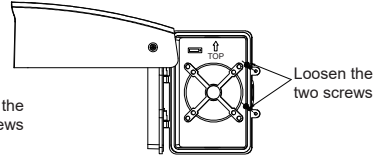


Fig 3.3

Step 4 Connect the male connector of power-side and the female connector of photocell-side. (Fig 4.1, Fig 4.2, Fig 4.3)




Fig 4.1




Fig 4.2




Fig 4.3

Step 5 Check the fixture to verify the photocell is working correctly. Tighten the two screws on the right side. Installation is complete. (Fig 5.1, Fig 5.2, Fig 5.3)




Fig 5.1




Fig 5.2





Fig 5.3

Schematic Diagram

37381H/37382B/37320D/37321C:

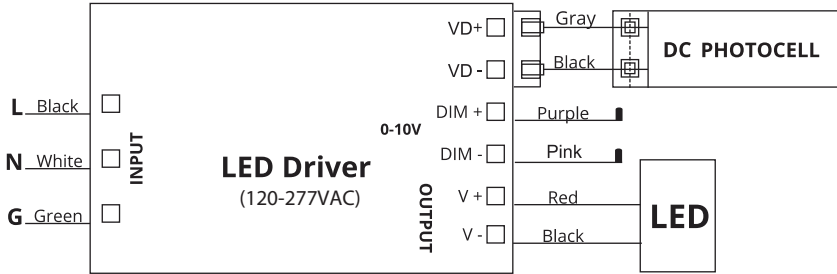

33742C/33744C:

