



FEATURES AND SPECIFICATIONS

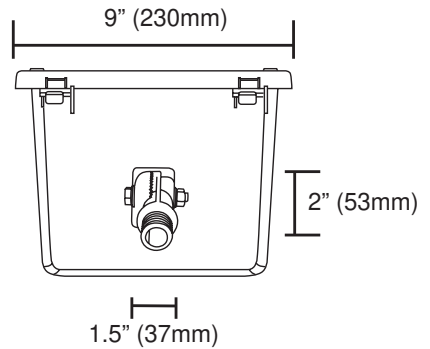


Overall Height: 7.25" (185mm)
Width: 9" (230mm)
Weight: 7.0 lbs (3.18kg)
Die Cast Aluminum Housing
Polycarbonate Lens
Low Maintenance
UL Listed for Wet Locations
IP 66 Rated
This fixture is warranted to be free of defects in materials and workmanship for a period of 3 years from the date of the original purchase.


DIMENSIONS

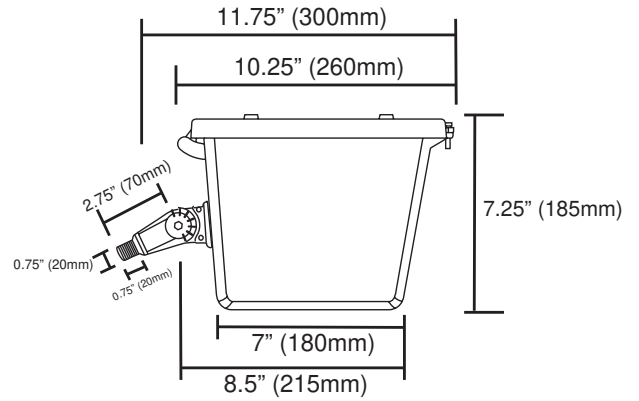

PHOTOMETRICS

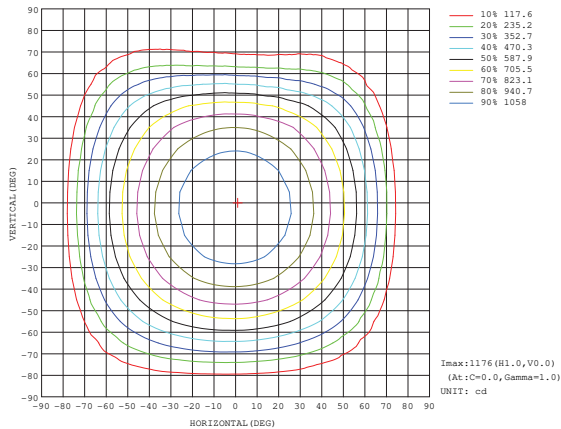


MOUNTING DETAILS

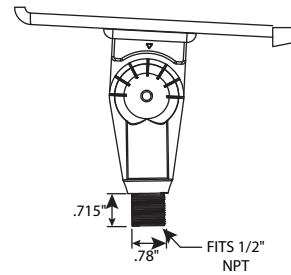

Wide-angle adjustable Kuckle Mount with angle indications of 30°, 60°, or 90°. Heavy Duty Kuckle Mount supports the floodlight that best suits your needs.



www.damar.com



38650A DFL-29LED/4K



Wattage: 29W
 CCT: 4100K
 CRI : 80
 Avg Lumens: 3300
 Voltage: 120-277V
 Hertz: 50/60Hz
 Current: 0.5-0.22A

DAMAR®

805 N Carnation
 Aurora, MO 65605