

# LED Parking Garage Fixture

## Specifications



**Item - 38700B**

**Model - LED PARKING GARAGE 60W/4K**

Bulb Type - LED

Input Voltage - 120-277

Watts - 60

Diameter - 15 Inches

Height - 11.875 Inches

Color Temp - 4000K

CRI - 70

Lumen - 7800

Finish - Bronze

Dimmable - No

UL Rating - Suitable for Wet Locations

Life - 50,000

## Caution

- This fixture must be wired in accordance with the National Electrical Code and applicable local ordinance. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.
- Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.
- Disconnect power at fuse or circuit breaker before installing or servicing
- Risk OF BURN--Disconnect power and allow fixture to cool before servicing.
- RISK OF PERSONAL INJURY--Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.



# LED Parking Garage Fixture



This fixture must be wired in accordance with the National Electrical Code and applicable local ordinance. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.

Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.

Disconnect power at fuse or circuit breaker before installing or servicing

Risk OF BURN--Disconnect power and allow fixture to cool before servicing.

RISK OF PERSONAL INJURY--Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

Este artefacto debe estar cableado de acuerdo con el Código Eléctrico Nacional y la ordenanza local aplicable. La conexión a tierra adecuada es necesaria para garantizar la seguridad personal. Observe cuidadosamente el procedimiento de puesta a tierra en la sección de instalación.

Asegúrese de que la energía esté desconectada antes de comenzar la instalación o intentar cualquier mantenimiento. Riesgo de incendio / descarga eléctrica. Si no está calificado, póngase un electrician.

Desconecte la energía en el fusible o interruptor de circuito antes instalación o servicio

Riesgo de QUEMADURAS - Desconecte la energía y permita que el accesorio se enfríe antes de dar servicio.

RIESGO DE LESIONES PERSONALES - El accesorio puede dañarse y / o ser inestable si no se instala correctamente. Apriete todos los componentes del dispositivo a sus valores de torque recomendados.

## Installation

This LED luminaires is designed for outdoor wet locations with ambient temperatures not to exceed 104F Fahrenheit.

In order to comply with established electrical code, the installer must seal the area around the mounting plate and the wall, with silicon sealant to provide a watertight seal.

Esta luminaria LED está diseñada para lugares húmedos al aire libre con temperaturas ambiente que no excedan los 104F Fahrenheit.

Para cumplir con el código eléctrico establecido, el instalador debe sellar el área alrededor de la placa de montaje y la pared, con sellador de silicona para proporcionar un sello hermético.

## Plate Mounting Installation

1. First, Take down the mounting plate to fix with Junction Box. Figure 1
2. Hang the lighting fixture with the mounting plate.
3. Connect the wires in the junction box
4. Screw the mounting plate to the fixture tightly. Figure




Figure 1





Figure 2

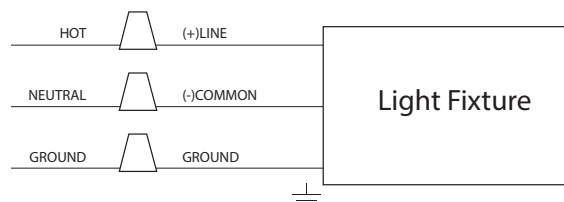

Wiring Diagram