

FEATURES AND SPECIFICATIONS


DIMENSIONS





- Low Maintenance
- Enhanced One Piece Polycarbonate Housing
- Motion-sensor Mounting Option
- Operating Temperature -30°F to 122°F
- 50,000 Hours Rated Average Life
- IP 65/UL Wet Location Rated
- Limited Warranty: This fixture is warranted to be free of defects in materials and workmanship for a period of 5 years from the date of the original purchase.

PHOTOMETRICS

Luminous Intensity Distribution

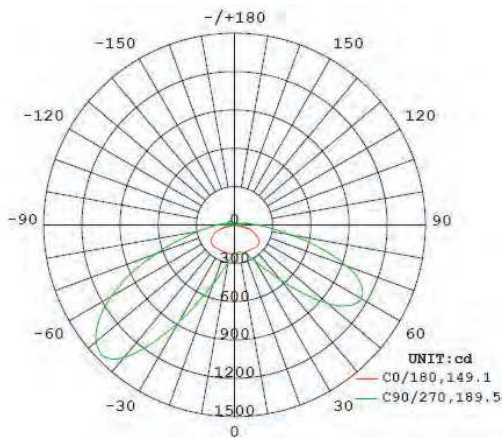

WIRING DETAILS

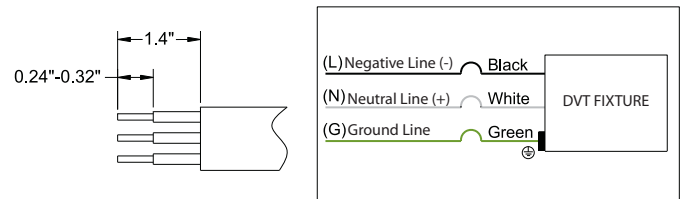

www.damar.com

38707A DVT- 40LED/4K



Wattage: 40W
 CCT: 4000K
 CRI: 70
 Avg Hours: 50,000
 Avg Lumens: 4000
 Voltage: 120-277V
 Hertz: 50/60Hz

DAMAR®

805 N Carnation
 Aurora, MO 65605

