


LED TT 2-PIN DUAL MODE

LED9TT/830/2P/DM
LED9TT/835/2P/DM
LED9TT/841/2P/DM

- UL Certified
- Two operation models:
- *Direct Replacement Mode (**Mode I**) Plug-n-Play replacement
Input Voltage: Determined by fluorescent ballast
Magnetic ballast compatible
- *By Pass Mode (**Mode II**) Direct connect with the mains:
120VAC 50/60Hz
- 25,000 Avg Life Hours
- GX23 2-Pin Base
- TT Bulb Shape
- 9.0 Watts

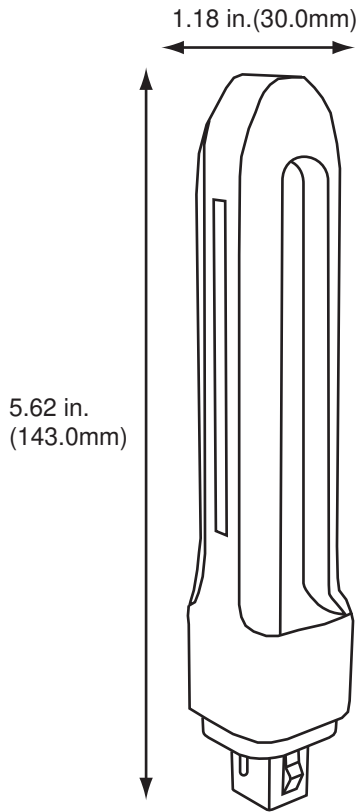

9.0 Watts

3000K

9.0 Watts

3500K

9.0 Watts

4100K

3

YEAR

LIMITED WARRANTY

Item Number	Avg Watts	Voltage	Base	Kelvin Color	Avg Life Hours	Average Lumens	Length	UL
33611A	9	120	2-PIN	3000K	25,000	800LM	5.62 in. (143.0mm)	Yes
33611B	9	120	2-PIN	3500K	25,000	800LM	5.62 in. (143.0mm)	Yes
33611C	9	120	2-PIN	4100K	25,000	800LM	5.62 in. (143.0mm)	Yes

Phone: (800) 238-9080
Fax: (877) 608-0597

Damar Worldwide 4 LLC
805 N Carnation
Aurora, MO 65605

dwwsales@damarww.com
www.damarww.com